


PROFILED STEEL ROOF CLADDING
Ridge Ventilation Detail

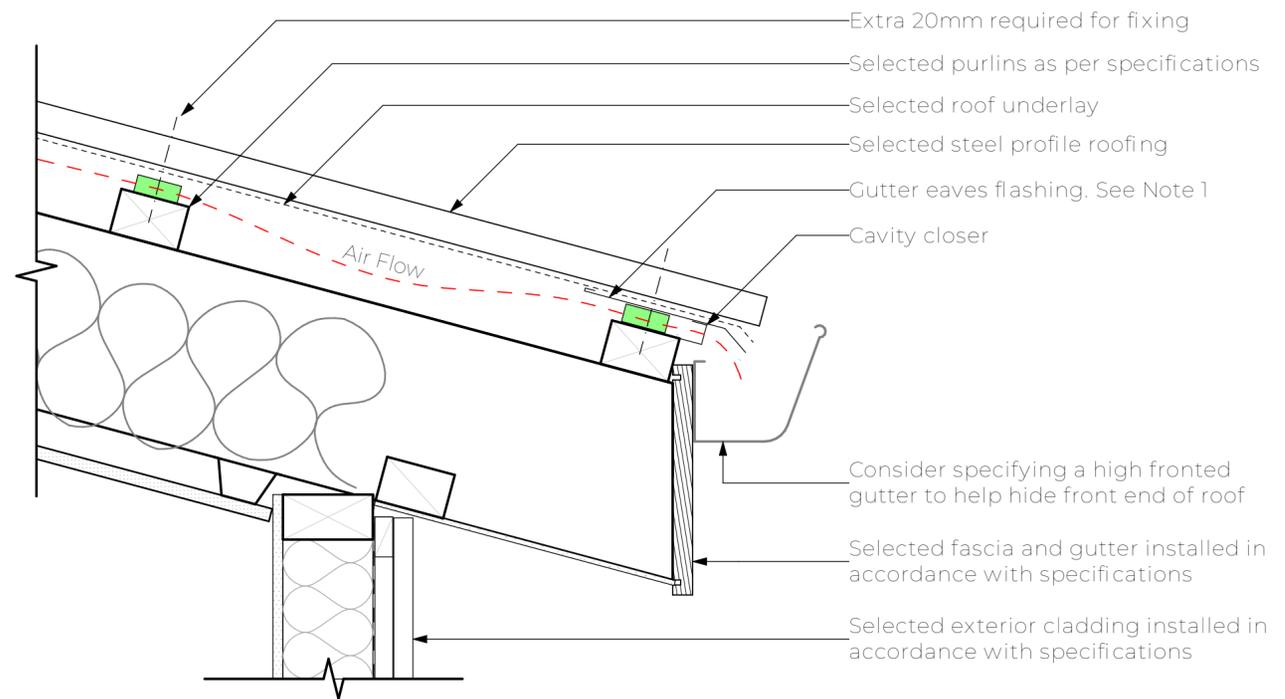

Note 1:
Eave flashing required where all of the following conditions are met
-Roof pitch less than 10° and,
-Soffit width less than or equal to 100mm and,
-Wind zone is Very High or greater.

Note 2:
A 25 mm minimum clearance is required between the insulation and any non-rigid roof underlay.

Note 3:
THIS IS A SUGGESTED METHOD OF VENTILATION BUT THE OVERALL DESIGN AND DIMENSIONS ARE THE RESPONSIBILITY OF THE DESIGNER IN COMPLIANCE WITH THE NZ BUILDING CODE.